

APOLLO ferrara vertical technical specification

FERRARA VERTICAL DIMENSIONS (mm)					
MODEL HEIGHTS 1000, 1200, 1400, 1800, 2000					
Width of radiator			290	410	530
No. of sections			5	7	9
Tube width			50		
Tube depth			30		
Section width	(tube + space)		60		
Radiator width			(No. of sections x 60) - 10		
Wall to front of rad		(A)	70		
Wall to pipe centres	Side entry	(Bs)	25		
	Bottom entry	(B)	55		
Tapping centres	Side entry	(C)	As width		
	Bottom entry	(D)	Width less 50		
Pipe centres	Side entry		Width plus valves		
	Bottom entry		Width less 50		
Brackets position	Top	(Et)	110		
	Bottom	(Eb)	110		

FERRARA 1000 HIGH WEIGHTS AND VOLUMES (per radiator)					
Model Width (mm)			290	410	530
Dry Weight (A) Kg			9.90	13.90	17.90
Water content (B) Litres			7.80	11.10	14.50
Working weight (A+B) Kg			17.70	25.00	32.40
Outputs: Watts $\Delta T=50k$			659	923	1186

FERRARA 1200 HIGH WEIGHTS AND VOLUMES (per radiator)					
Model Width (mm)			290	410	530
Dry Weight (A) Kg			11.50	16.00	20.60
Water content (B) Litres			9.30	13.20	17.20
Working weight (A+B) Kg			20.80	29.20	37.80
Outputs: Watts $\Delta T=50k$			755	1058	1359


FERRARA 1400 HIGH WEIGHTS AND VOLUMES (per radiator)					
Model Width (mm)			290	410	530
Dry Weight (A) Kg			13.80	18.50	23.20
Water content (B) Litres			10.80	15.30	19.90
Working weight (A+B) Kg			24.60	33.80	43.10
Outputs: Watts $\Delta T=50k$			858	1201	1543

FERRARA 1800 HIGH WEIGHTS AND VOLUMES (per radiator)					
Model Width (mm)			290	410	530
Dry Weight (A) Kg			16.70	22.60	28.50
Water content (B) Litres			13.80	19.50	25.30
Working weight (A+B) Kg			30.50	42.10	53.80
Outputs: Watts $\Delta T=50k$			1090	1526	1961

FERRARA 2000 HIGH WEIGHTS AND VOLUMES (per radiator)					
Model Width (mm)			290	410	530
Dry Weight (A) Kg			18.20	24.70	32.00
Water content (B) Litres			15.30	21.60	28.00
Working weight (A+B) Kg			33.50	46.30	60.00
Outputs: Watts $\Delta T=50k$			1199	1679	2157

The thermal outputs expressed at $\Delta T=50k$ comply with European regulation EN 442-2

ADDITIONAL INFORMATION	
Material	304 grade stainless steel
Steel tube measurements	30mm x 50mm
Steel thickness	1.2mm
Maximum working pressure	4 bar/400kPa
Testing pressure	6 bar/600kPa
Maximum working temperature	90°C

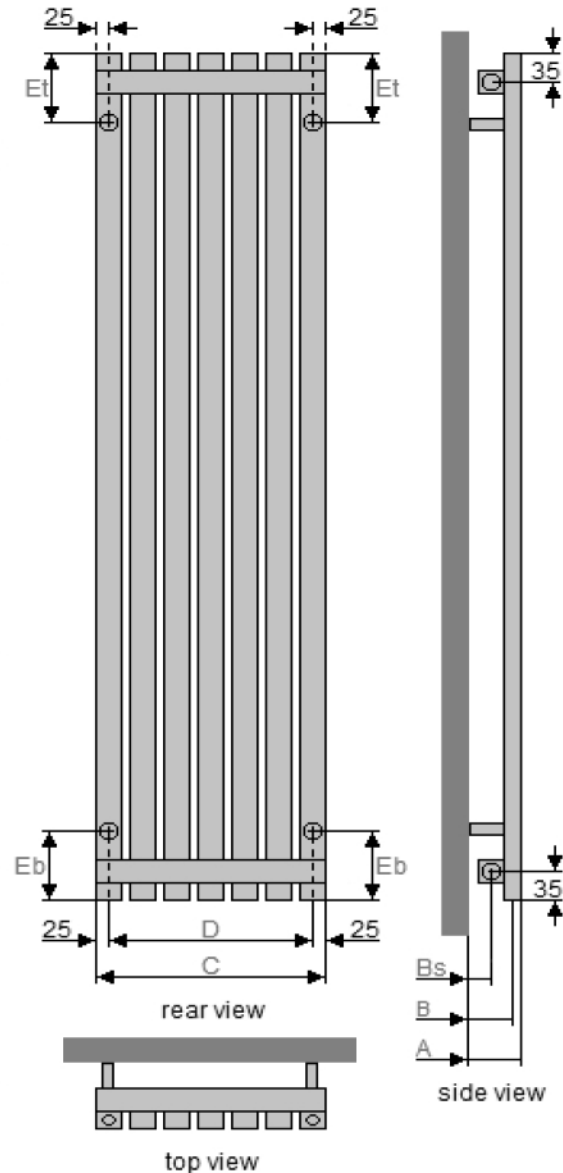

TEMPERATURE FACTORS FOR DIFFERENCES BETWEEN MEAN WATER TEMPERATURE AND ROOM TEMPERATURE IN °C AND °F OTHER THAN 50°C (90°F)			
5°C	0.050		
10°C	0.123	10°F	0.057
15°C	0.209	20°F	0.142
20°C	0.304	30°F	0.240
25°C	0.406	40°F	0.348
30°C	0.515	50°F	0.466
35°C	0.629	60°F	0.590
40°C	0.748	70°F	0.721
45°C	0.872	80°F	0.858
50°C	1.000	90°F	1.000
55°C	1.132	100°F	1.147
60°C	1.267	110°F	1.298
65°C	1.406	120°F	1.454
70°C	1.549	130°F	1.613
75°C	1.694	140°F	1.776

TO APPLY THE FACTORS SHOWN IN THE TABLE TO OUR QUOTED OUTPUTS MULTIPLY THE QUOTED OUTPUT BY THE CHOSEN OPERATING FACTOR TO GIVE THE OUTPUT