


APOLLO magenta shark vertical technical specification

1500 HIGH

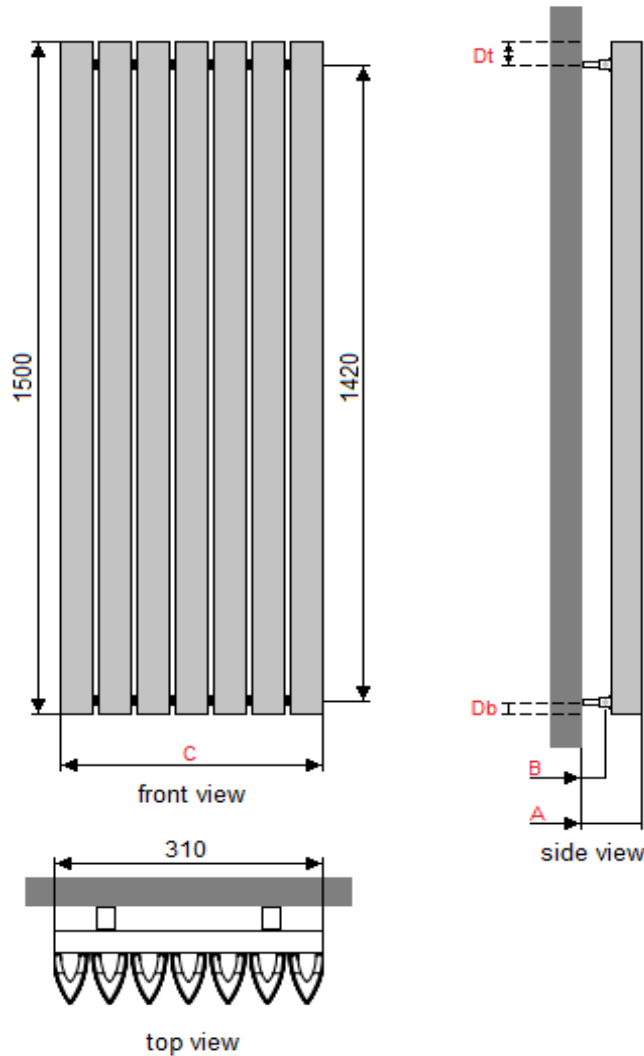

MAGENTA SHARK VERTICAL DIMENSIONS (mm)				
MODEL HEIGHT				1500
Width of radiator			310	400 490
No. of sections			7	9 11
Section depth x width				65 x 40
Wall to front of rad		(A)		137-154
Wall to pipe centres	Side entry	(B)		51-68
	Bottom entry			N/A
Tapping centres	Side entry	(C)	305	395 485
	Bottom entry			N/A
Bracket positions	Top	(Dt)		50.5
	Bottom	(Db)		29.5
Tappings				1/2"

MAGENTA SHARK VERTICAL WEIGHTS AND VOLUMES (per radiator)				
Model Width (mm)			310	400 490
Dry Weight (A) Kg			13.80	17.68 21.57
Water content (B) Litres			1.35	1.74 2.13
Working weight (A+B) Kg			15.15	19.42 23.70
Outputs: Watts $\Delta T=50k$			721	927 1130

The thermal outputs expressed at $\Delta T=50k$ comply with European regulation EN 442-1

ADDITIONAL INFORMATION	
Material	Aluminium Alloy 6063 T5
Alloy thickness	1.2 - 2.0mm
Maximum working pressure	6 bar
Mechanical strength test pressure	10.14 bar/1014 kPa
Maximum working temperature	90°C

TEMPERATURE					
FACTORS FOR DIFFERENCES BETWEEN MEAN WATER TEMPERATURE AND ROOM TEMPERATURE IN °C AND °F OTHER THAN 50°C (90°F)					
5°C	0.050				
10°C	0.123	10°F	0.057		
15°C	0.209	20°F	0.142		
20°C	0.304	30°F	0.240		
25°C	0.406	40°F	0.348		
30°C	0.515	50°F	0.466		
35°C	0.629	60°F	0.590		
40°C	0.748	70°F	0.721		
45°C	0.872	80°F	0.858		
50°C	1.000	90°F	1.000		
55°C	1.132	100°F	1.147		
60°C	1.267	110°F	1.298		
65°C	1.406	120°F	1.454		
70°C	1.549	130°F	1.613		
75°C	1.694	140°F	1.776		

TO APPLY THE FACTORS SHOWN IN THE TABLE TO OUR QUOTED OUTPUTS MULTIPLY THE QUOTED OUTPUT BY THE CHOSEN OPERATING FACTOR TO GIVE THE OUTPUT