


# APOLLO magenta curve low level technical specification

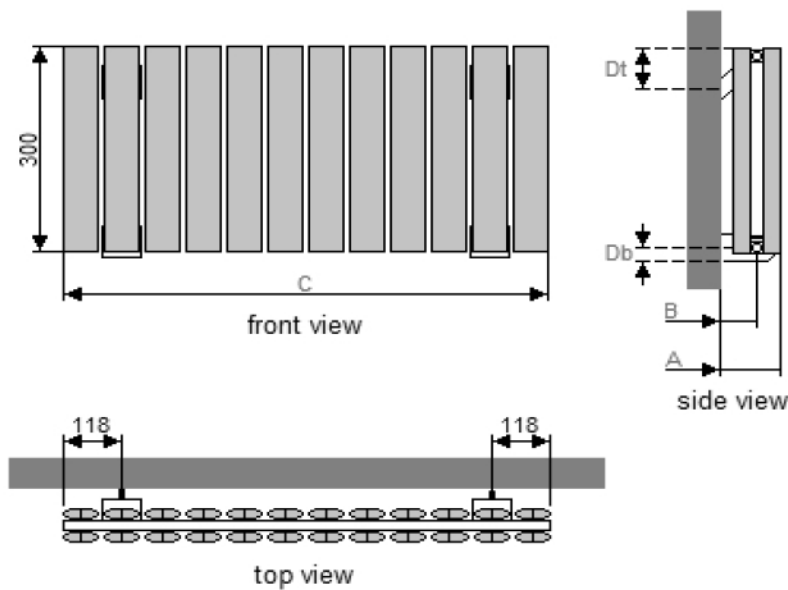

MAGENTA CURVE LOW LEVEL DIMENSIONS (mm)			
MODEL HEIGHT			300
Width of radiator		955	1195
No. of sections		12	15
Section depth x width		75 x 80	
Back wall to front of rad	(A)	88	
Back wall to pipe centres	Side entry (B)	50	
	Bottom entry	N/A	
Tapping centres	Side entry (C)	955	1195
	Bottom entry	N/A	
Bracket positions	Top (Dt)	60	
	Bottom (Db)	16	
Tappings		1/2"	

MAGENTA CURVE LOW LEVEL WEIGHTS AND VOLUMES (per radiator)			
Model Width (mm)	955	1195	1435
Dry Weight (A) Kg	7.87	9.84	11.81
Water content (B) Litres	1.23	1.53	1.84
Working weight (A+B) Kg	9.10	11.37	13.65
Outputs: Watts $\Delta T=50k$	720	900	1080

The thermal outputs expressed at  $\Delta T=50k$  comply with European regulation EN 442-2

ADDITIONAL INFORMATION	
Material	Aluminium Alloy 6063 T5
Alloy thickness	1.2 - 2.0mm
Maximum working pressure	6 bar
Mechanical strength test pressure	10.14 bar/1014 kPa
Maximum working temperature	90°C

TEMPERATURE FACTORS FOR DIFFERENCES BETWEEN MEAN WATER TEMPERATURE AND ROOM TEMPERATURE IN °C AND °F OTHER THAN 50°C (90°F)			
5°C	0.050	10°F	0.057
10°C	0.123	20°F	0.142
15°C	0.209	30°F	0.240
20°C	0.304	40°F	0.348
25°C	0.406	50°F	0.466
30°C	0.515	60°F	0.590
35°C	0.629	70°F	0.721
40°C	0.748	80°F	0.858
45°C	0.872	90°F	1.000
50°C	1.000	100°F	1.147
55°C	1.132	110°F	1.298
60°C	1.267	120°F	1.454
65°C	1.406	130°F	1.613
70°C	1.549	140°F	1.776
75°C	1.694		

TO APPLY THE FACTORS SHOWN IN THE TABLE TO OUR QUOTED OUTPUTS MULTIPLY THE QUOTED OUTPUT BY THE CHOSEN OPERATING FACTOR TO GIVE THE OUTPUT